


Team of Russia

Presented by Nikita Shanin

Problem №15 «Slow Descent»:

Design and make a device, using one sheet of A4 80 gram per m² paper that will take the longest possible time to fall to the ground through a vertical distance of 2.5m. A small amount of glue may be used. Investigate the influence of the relevant parameters.

Plan of solution

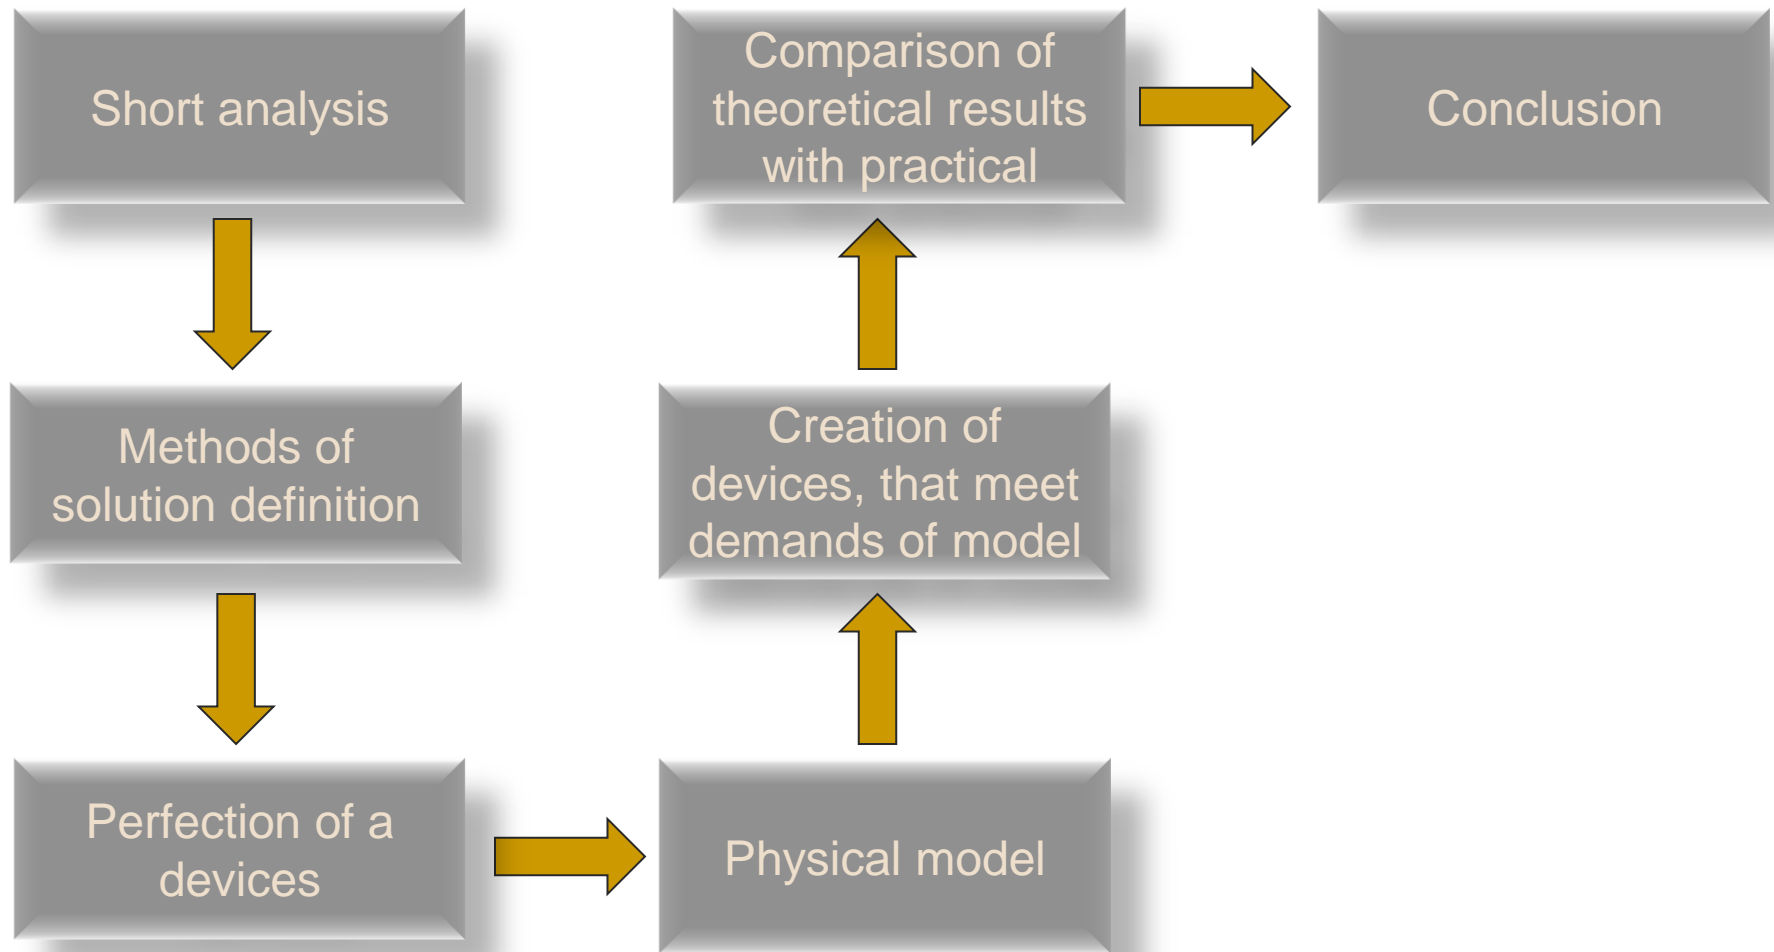

Short analysis



- Translational motion:

$$E_p = E_{k \text{ trans.}} + W_{\text{drag}}$$

Methods of problem's solution


decline of velocity's vertical component

Short analysis




- Translational and rotational motion:


$$E_p = E_{k \text{ trans.}} + W_{\text{drag trans}} + E_{k \text{ rotat.}} + W_{\text{drag rotat.}}$$

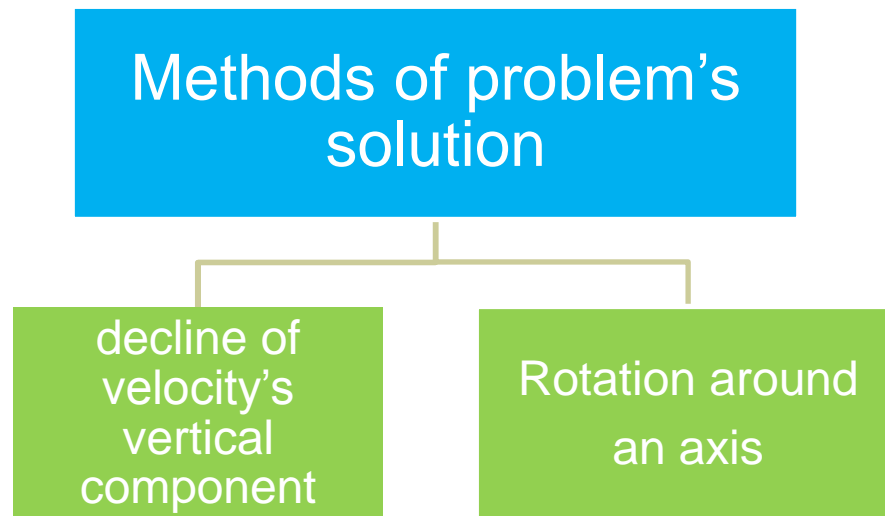

Dependence $\omega(t)$

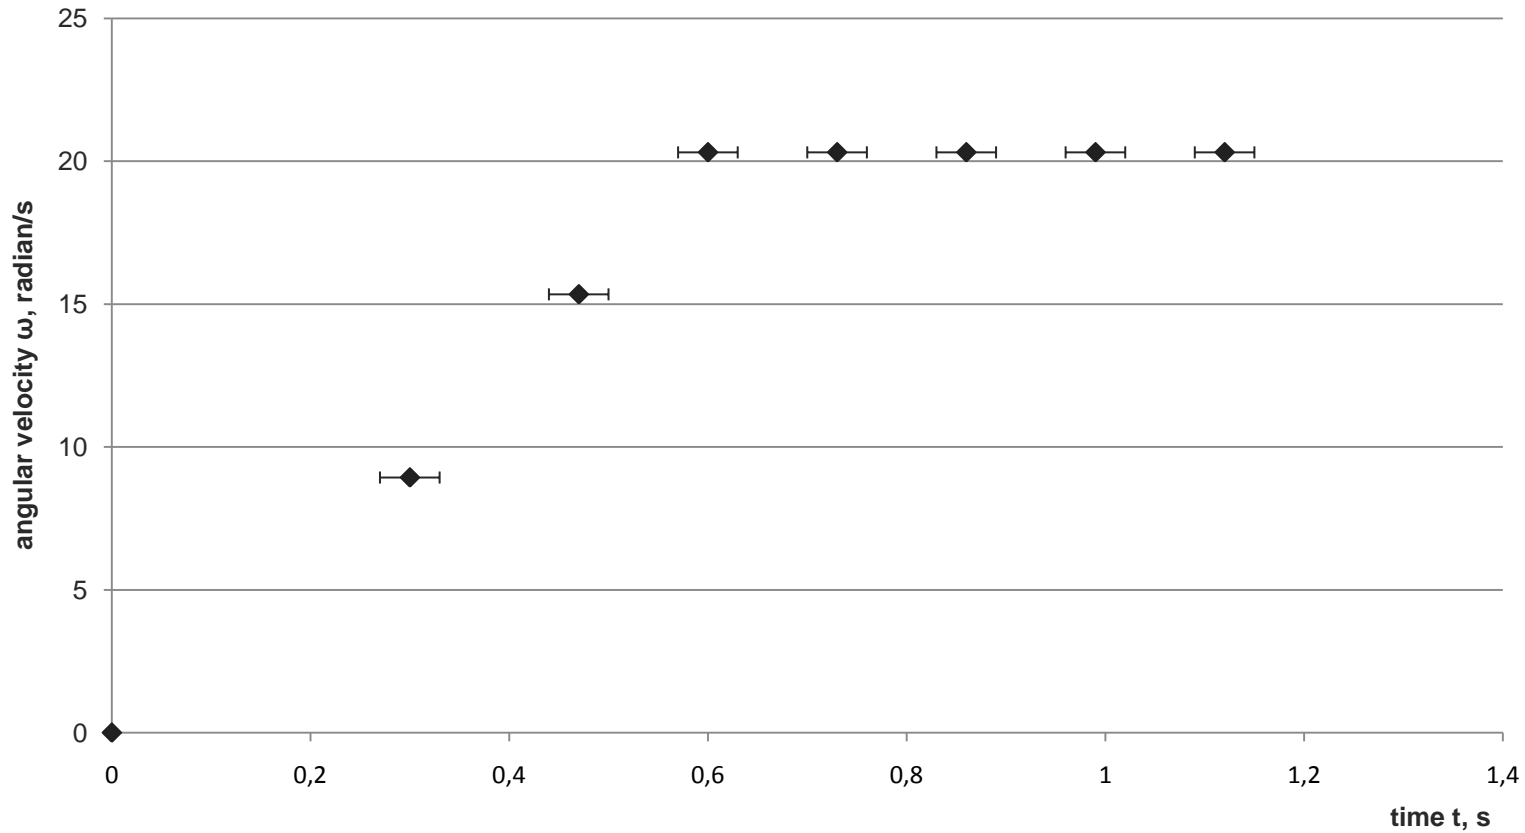


[Physical model]

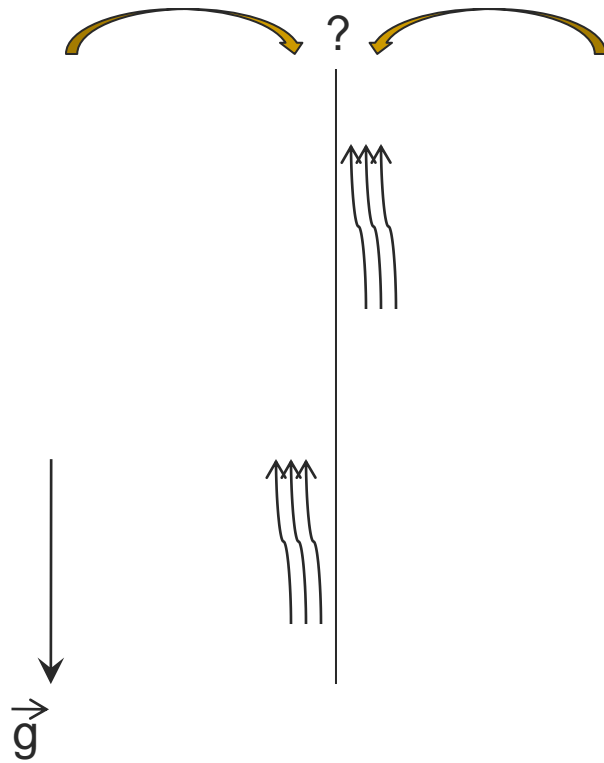


Weaknesses:

- instability
- fuzzy concept
- governed by chance

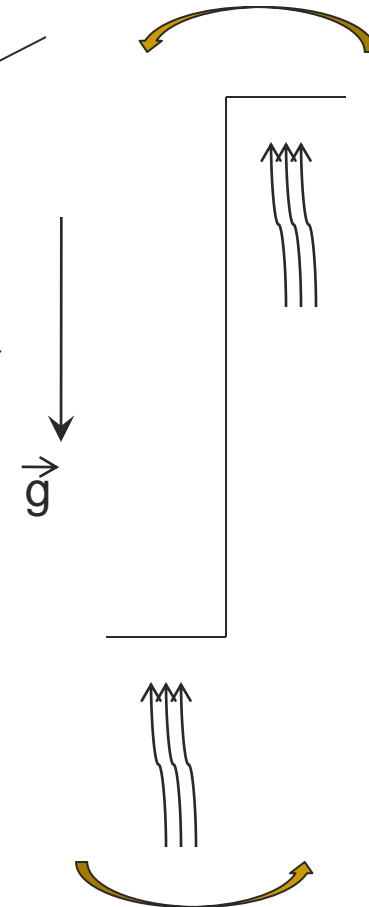

[Physical model

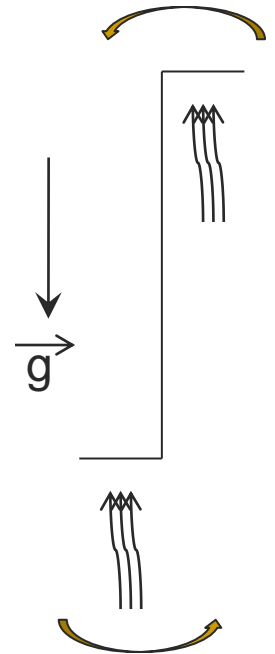


Dependence ω on length of stiffener




2 pieces; landscape	Length of stiffeners, cm	ω , rad/s
	0	10
	0,5	15,7
	1	20,93
	1,5	22,43
	2	25,12
	2,5	22,43
	3	19,03

2 pieces; landscape	Time using stiffeners	Time
	6,1	2,7
	6,2	2,9
	5,9	3,4
	5,7	3,2
	5,8	3,6
Average time	$5,94 \pm 0,3$	$3,16 \pm 0,6$

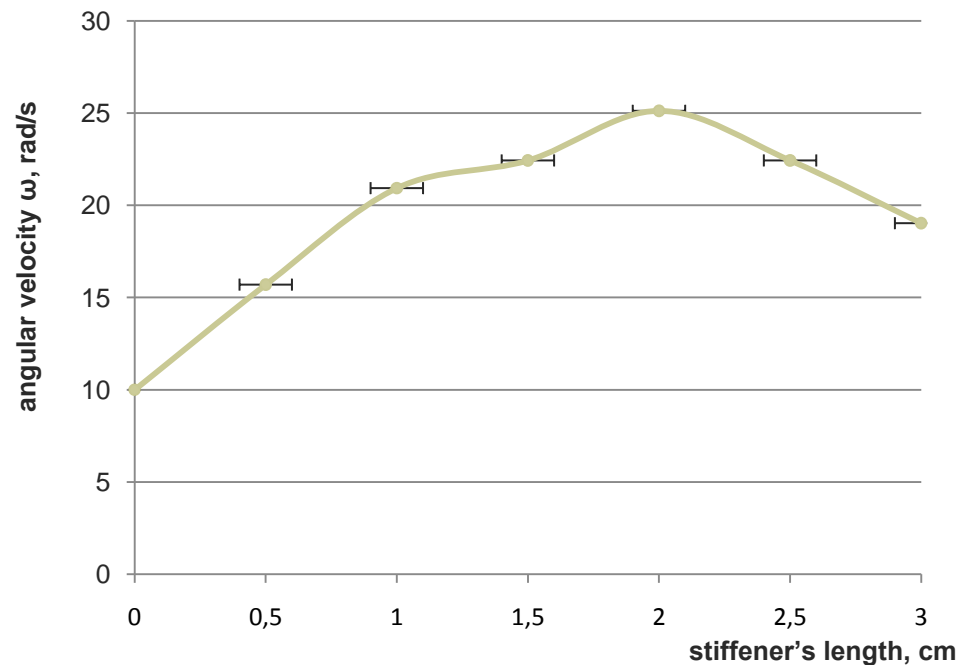

Physical model

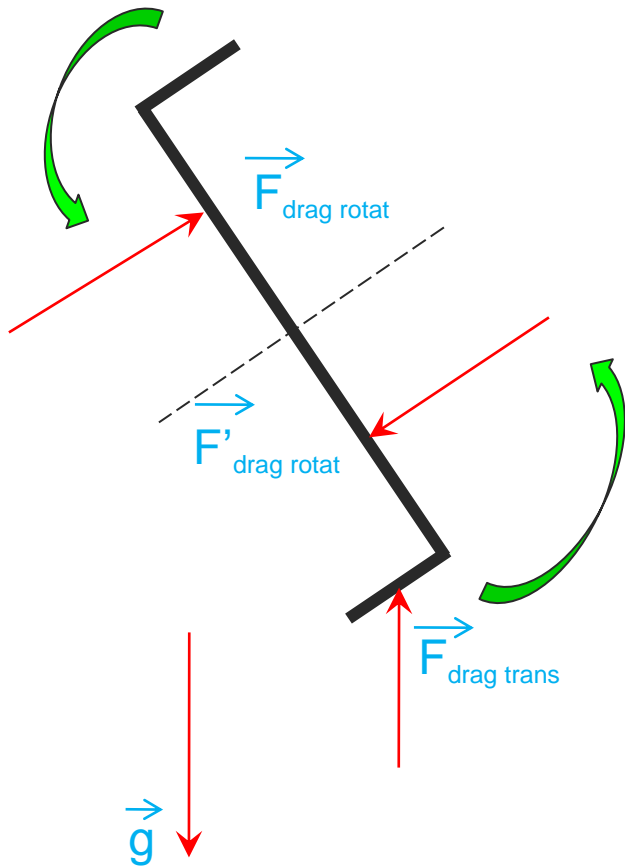

Energy balance:


$$E_p = E_{k1} + E_{k2} + W_{\text{drag1}} + W_{\text{drag2}}$$

After some transformations:



$$mgh = \frac{mv^2}{2} + \frac{m(r\omega)^2}{24} + \alpha * v^2 * S * l + \beta * (r\omega)^2 * r/4 * 2\pi * N$$

$$v = \sqrt{\frac{mgh - \beta * (r * \omega)^2 * r/4 * 2\pi * N}{m/2 + \alpha * l * S}}$$

Devices which were used and their size




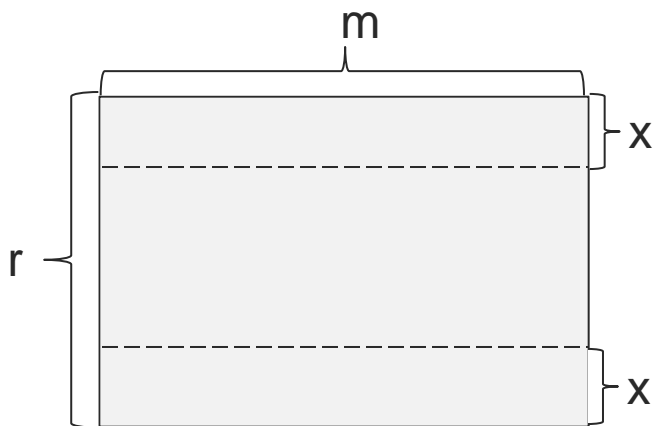


format	r, m	m, m	x cm	$(\omega*r)^2$
A4	0,21	0,3	4	3,65

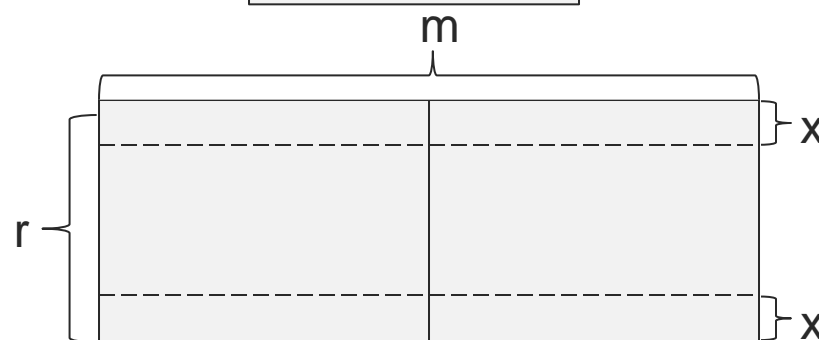

format	r m	m, m	x cm	$(\omega*r)^2$
2 p. portrait	0,15	0,42	3	18,07



Devices which were used and their size

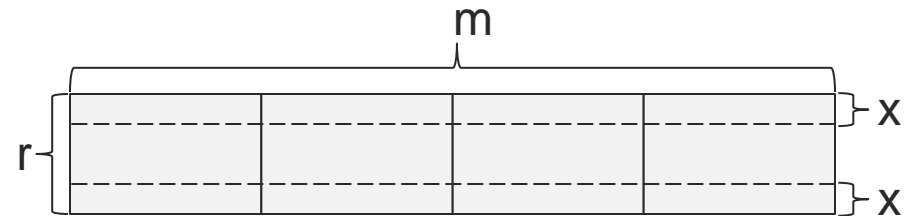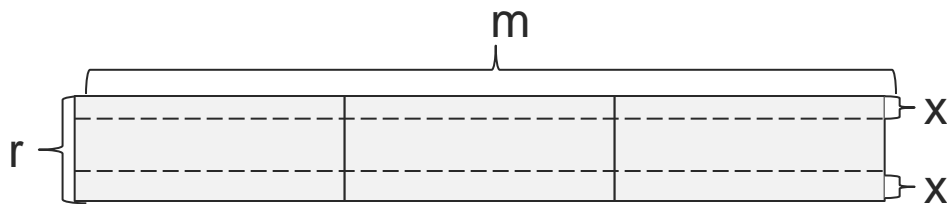



format	r m	m, m	x cm	$(\omega*r)^2$
3 p. portrait	0,1	0,63	2	5,41

format	r m	m, m	x cm	$(\omega*r)^2$
4 p. portrait	0,075	0,85	1,5	7,68

Devices which were used and their size

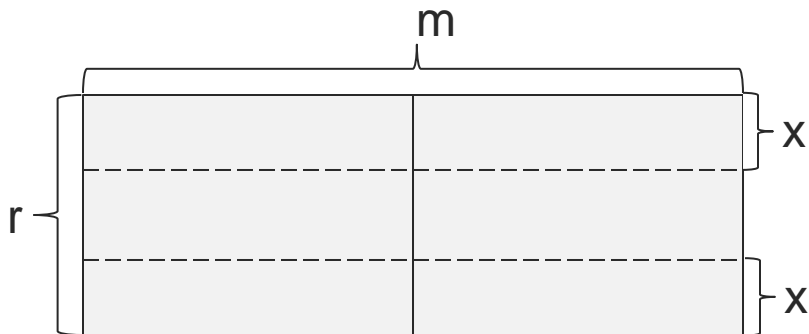



format	r m	m, m	x cm	$(\omega*r)^2$
2 p. landsc.	0,105	0,6	2	6,96

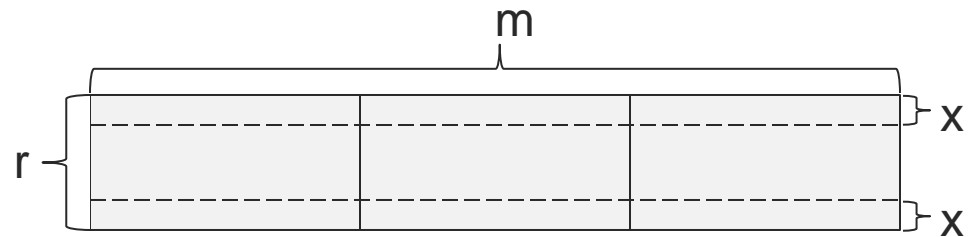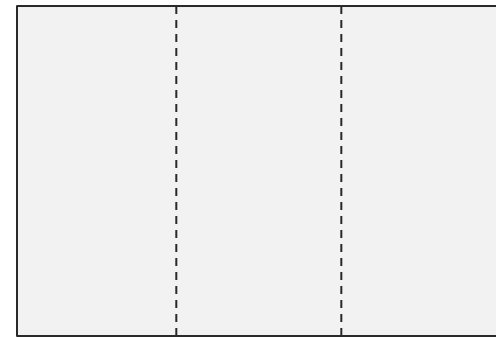


format	r m	m, m	x cm	$(\omega*r)^2$
3 p. landsc.	0,07	0,9	1,5	5,96

Devices which were used and their size

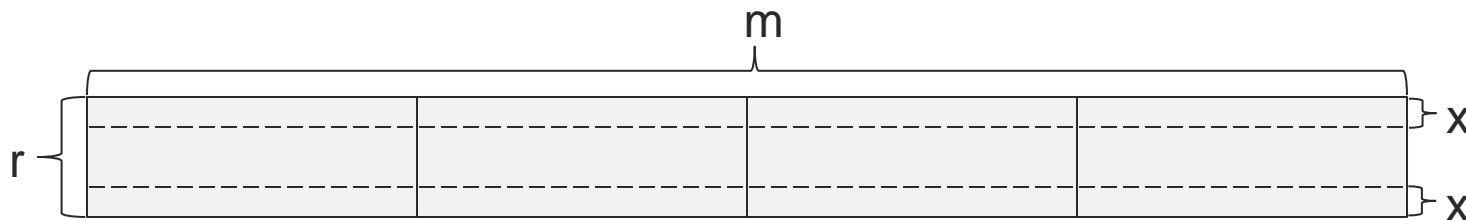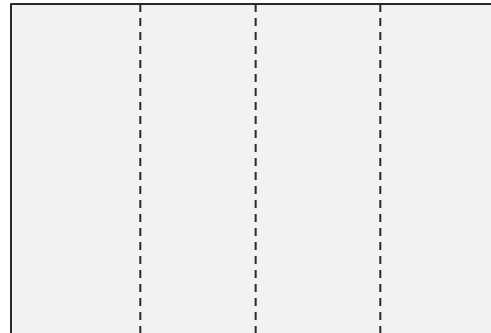

format	r m	m, m	x cm	$(\omega*r)^2$
4 p. landsc.	0,0525	1,2	1	0,07

Comparison of theoretical results with practical ones

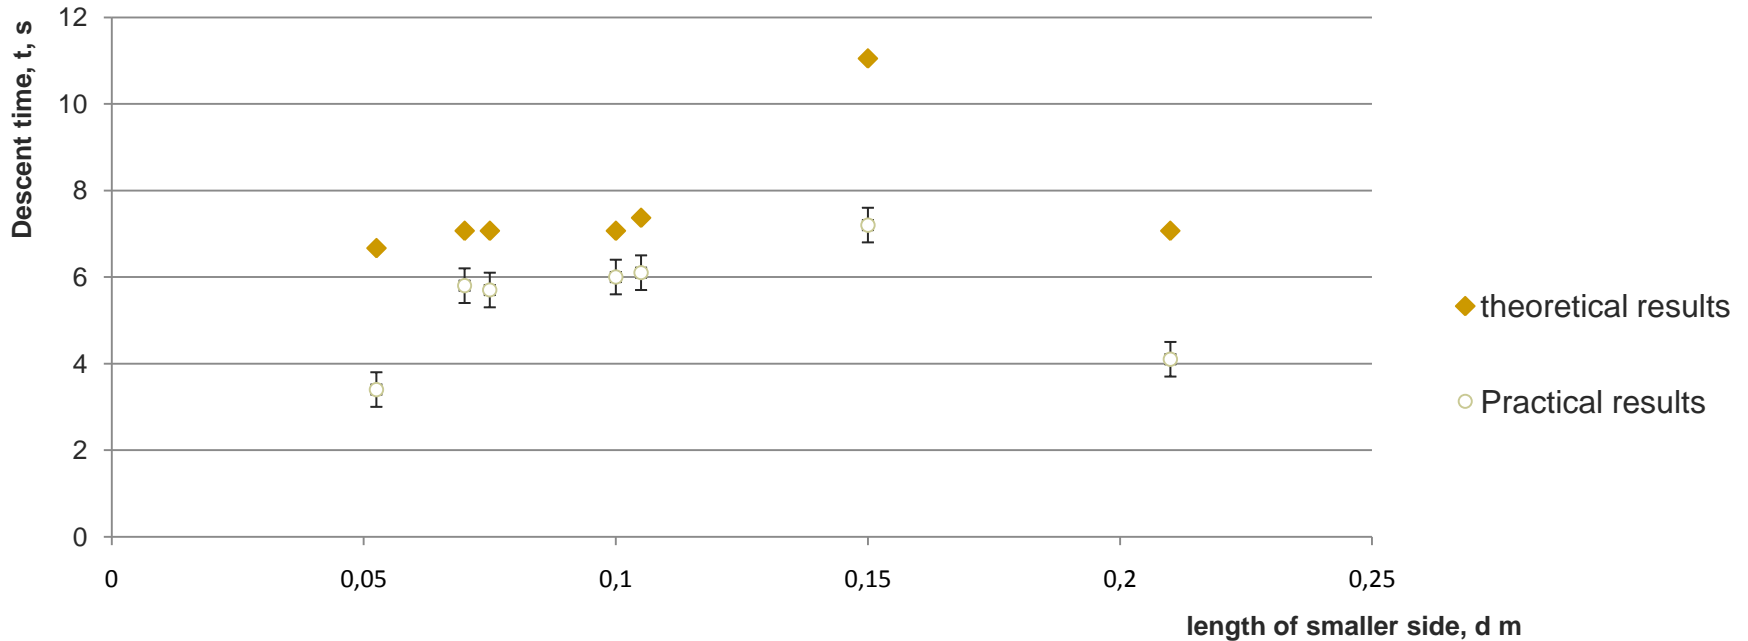

$$t = l / \sqrt{\frac{mgh - \beta * (r * \omega)^2 * r / 4 * 2\pi * N}{m / 2 + \alpha * l * S}}$$

Conclusion



Parameters of the device which take the longest possible time to fall to the ground through a vertical distance of 2.5m:

- length of sides 15x42 cm.
- length of stiffener 3 cm


The relevant parameters:

- stiffeners
- format of device



Action of $W_{F_{\text{drag}}}$

$$mgh = \frac{mv^2}{2} + \frac{I\omega^2}{2} + W_{\text{drag trans}} + W_{\text{drag rotat}}$$

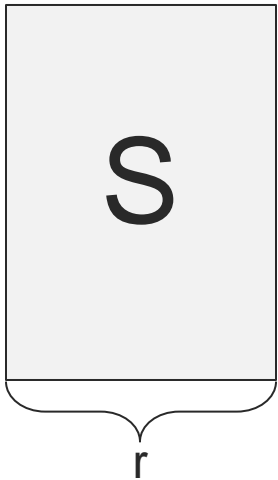

$$I = \frac{mr^2}{12}$$

$$W_{\text{drag trans.}} = \alpha * v^2 * S * d$$

d is the distance which object has get over
v is a linear velocity of a device
S is a contact area between air and device

$$W_{\text{drag rotat.}} = M_f * \varphi = \beta * (r\omega)^2 * r/4 * 2\pi * N$$

r is a length of a smaller side
 ω is an angular velocity of a device
N is a number of complete turns at full time of descent

$$mgh = \frac{mv^2}{2} + \frac{m(r\omega)^2}{24} + \alpha * v^2 * S * l + \beta * (r\omega)^2 * r/4 * 2\pi * N$$

$$v = \sqrt{\frac{mgh - \beta * (r * \omega)^2 * r/4 * 2\pi * N}{m/2 + \alpha * l * S}}$$